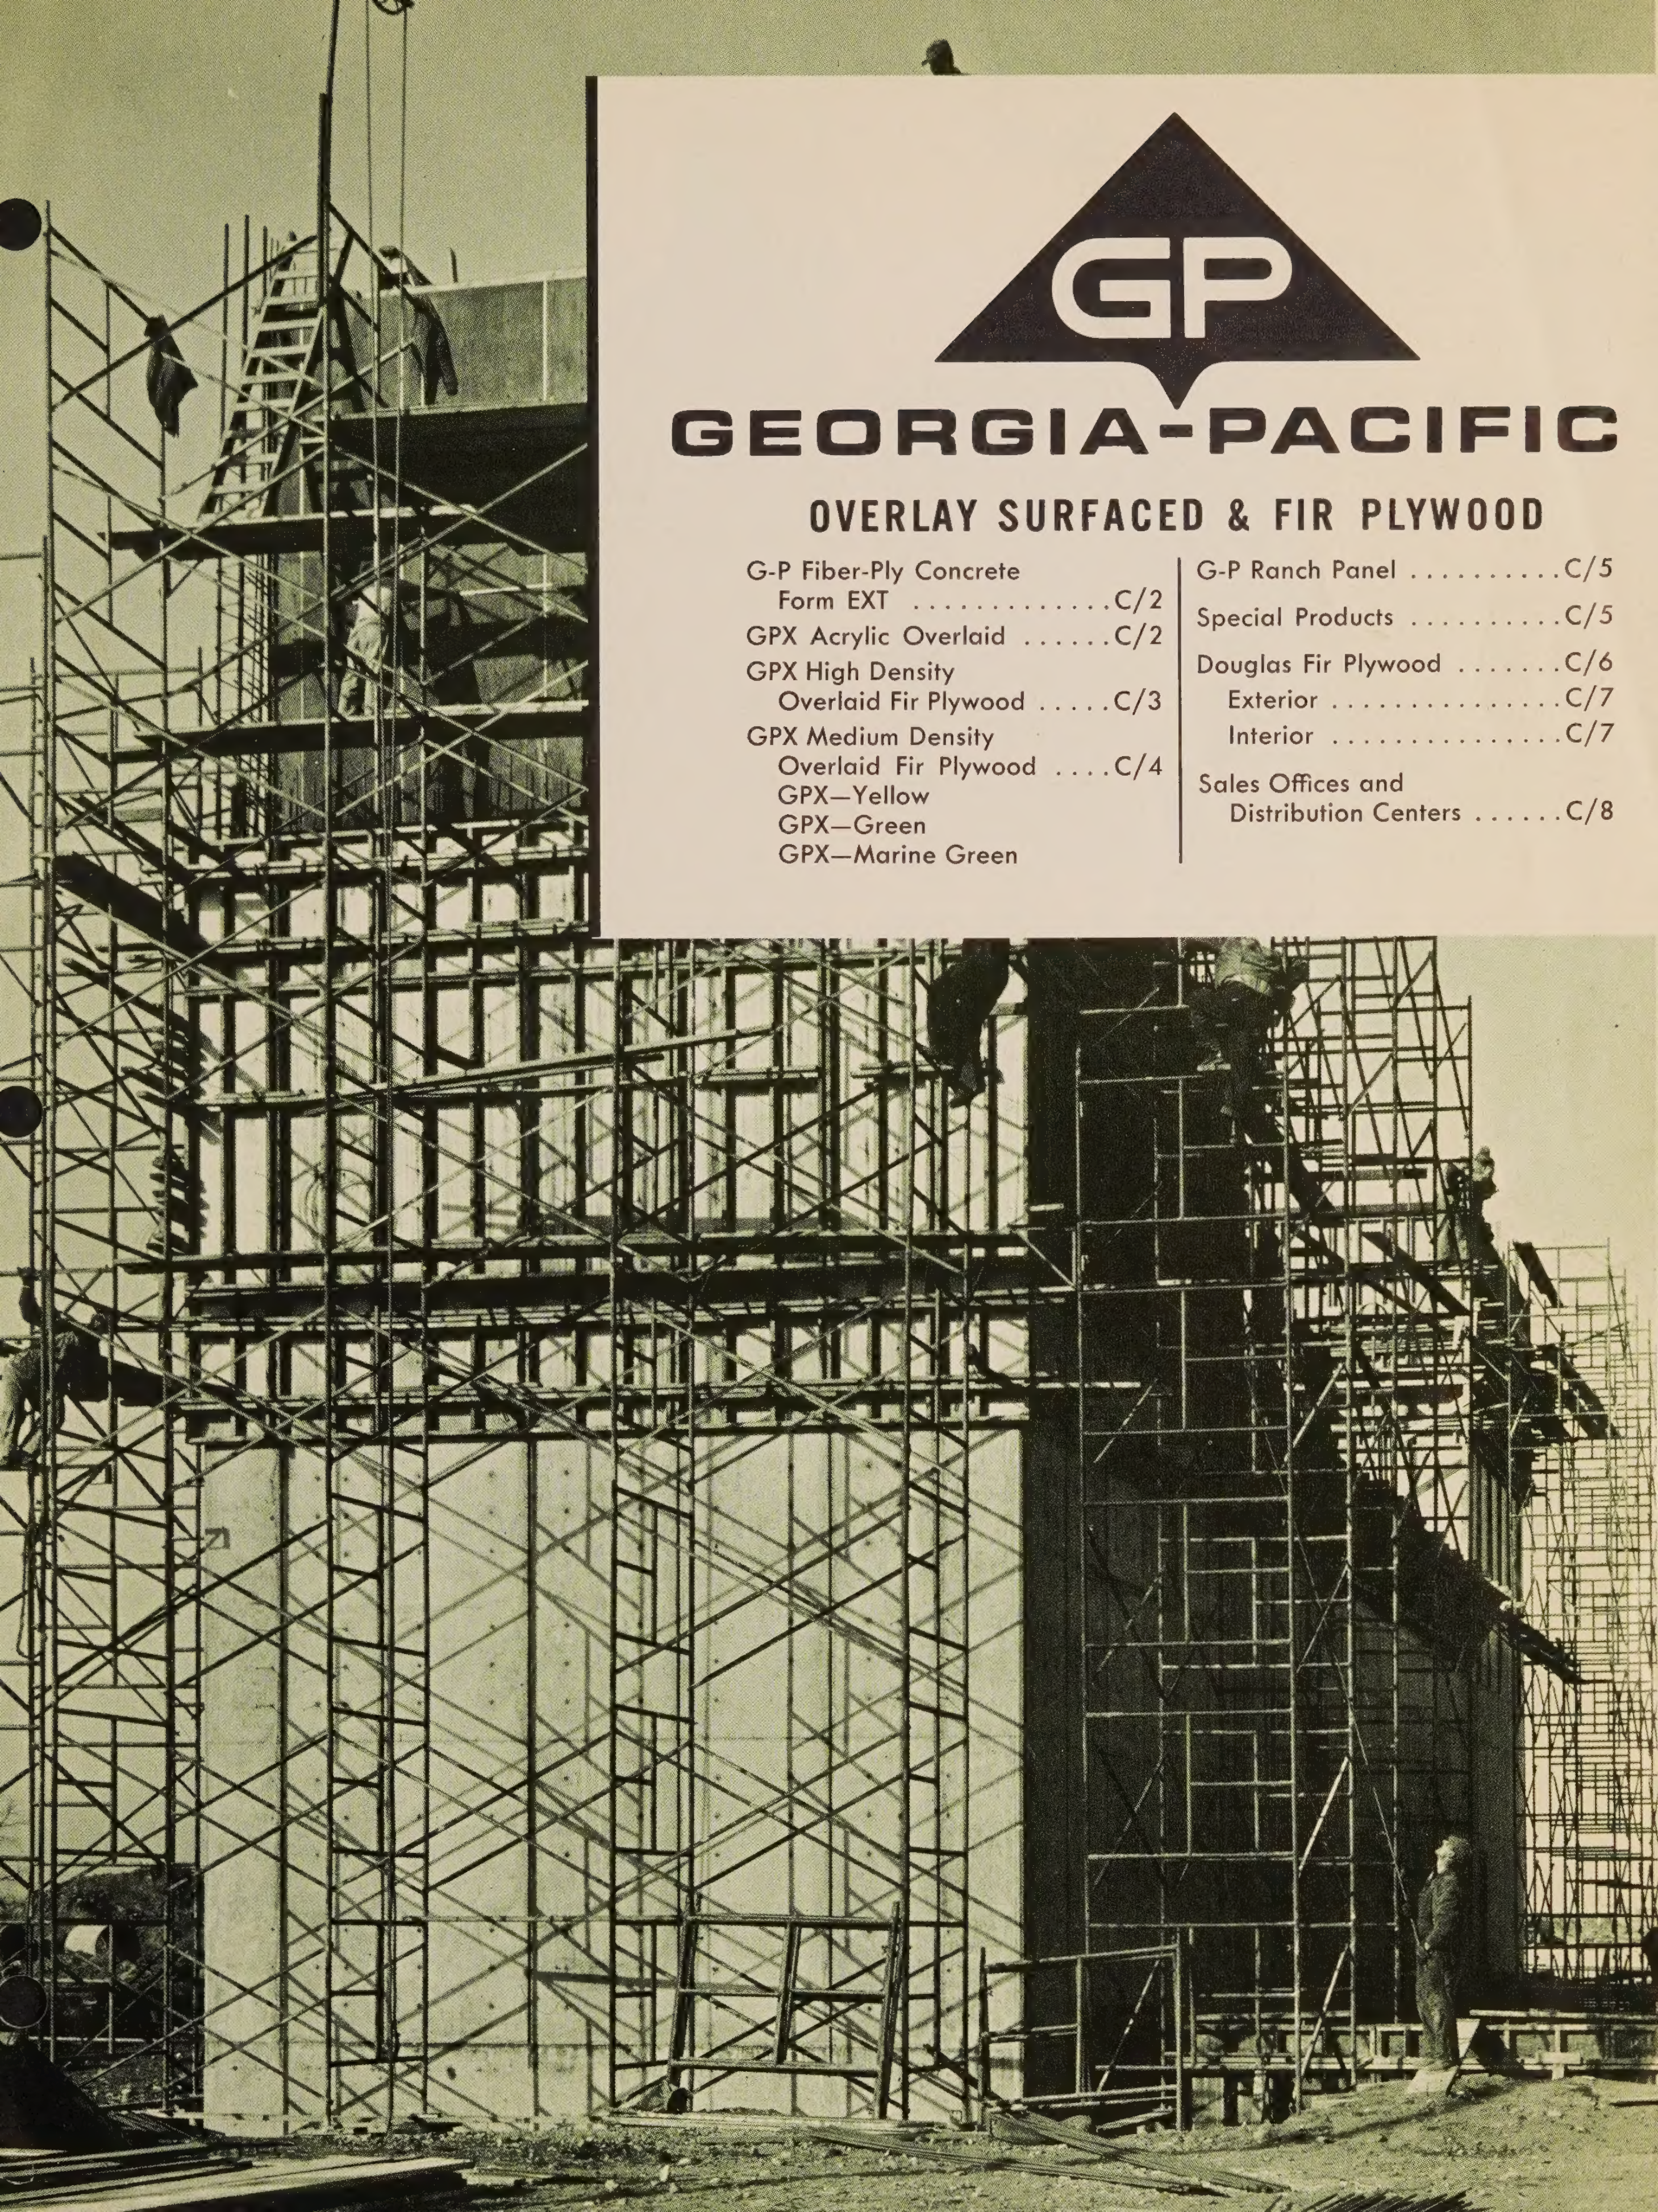

GEORGIA-PACIFIC

OVERLAY SURFACED & FIR PLYWOOD

G-P Fiber-Ply Concrete Form EXT C/2
GPX Acrylic Overlaid C/2
GPX High Density Overlaid Fir Plywood C/3
GPX Medium Density Overlaid Fir Plywood C/4
  GPX—Yellow
  GPX—Green
  GPX—Marine Green
G-P Ranch Panel C/5
Special Products C/5
Douglas Fir Plywood C/6
  Exterior C/7
  Interior C/7
Sales Offices and Distribution Centers C/8

FIBER-PLY® CONCRETE FORM EXT.

a superior surfaced plywood

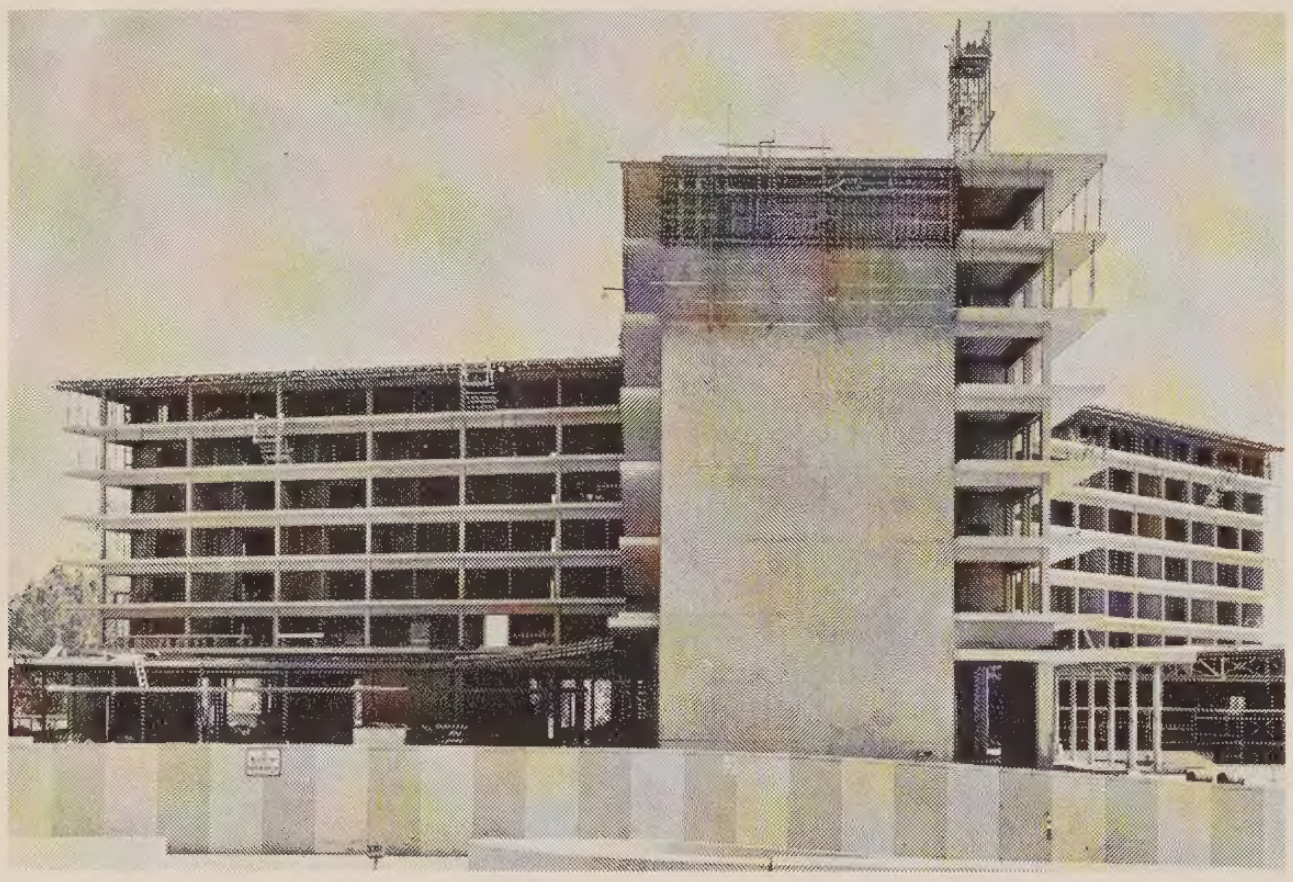

Georgia-Pacific Fiber-Ply® Concrete Form EXT. is the superior forming material—ultra-smooth concrete surfaces at lowest cost. Fiber-Ply is a completely new type of overlaid plywood manufactured under a patented process exclusively by Georgia-Pacific. Douglas Fir veneers are bonded with 100% waterproof adhesive and the panels are overlaid with a resin impregnated fiber surface in an automatic and continuous process to form this new rugged high-quality, low-cost plywood.

SMOOTH SURFACE—No splitting or checking of its rugged surface even after many uses. Smoother concrete with Fiber-Ply. Forms strip clean and quickly. Thickness variations limited to 1/50″ plus or minus for uniform concrete surfaces.

REUSABLE—The hard, dense, smooth face of Fiber-Ply Concrete Form EXT. is specially engineered to give a maximum number of repours. Fiber-Ply should be re-oiled after each use for continued superior forming service.

ECONOMICAL MAINTENANCE—G-P Fiber-Ply Concrete Form EXT. is oiled and edge-sealed at the factory. Dense resin fiber surface requires less form oil when re-oiling.

SPECIFICATIONS

Type	Concrete Form Ext.
Face	Resin Overlay
Back	Fir Plywood
Color	Face—Brown Back—Natural
No. Veneer Plies	5 (100% Douglas Fir)
Glue Bond	Exterior
Thickness*	¾″
Width	4′
Length	8′
Weight per M Sq. Ft.	2225 lbs.

*Thickness variations limited to 1/50″ plus or minus for uniform concrete surfaces.

Made under U.S. Pat. 2,992,152 and other Pats. Pending.

GPX® ACRYLIC OVERLAID PLYWOOD

Red
Blue
Green
White

Engineered for construction of highway control signs, commercial signs and architectural applications

MATERIAL—GPX Acrylic Overlaid Plywood Panels are manufactured of "B" grade Douglas Fir veneers, hot press laminated with exterior waterproof glue in accordance with U. S. Commercial Standards 45-60. Edge-jointed and edge-glued cores available if specified.

The Acrylic overlay is Kimpreg 8000, a fiber-resin saturated and coated material as manufactured by Kimberly Clark. The saturant is a thermoplastic resin which is pigmented with weatherproof colors. The face coating material also is a pigmented thermoplastic resin.

FEATURES—GPX Acrylic Overlaid Plywood is formulated to provide the finest sign surface for either painted or all types of reflective legends, and for use as exterior siding in commercial-industrial applications.

- Resists damage from severe weather, accidents or vandalism. Will not burst, bend, tear, rust or corrode—lower maintenance costs.
- Substantial cost savings under other materials. GPX costs less, lasts longer than metal.
- No expensive surface preparation necessary.
- Superior surface. No surface waves to cause "specular glare" when fully reflectorized.
- Greater built-in safety. Less night-time surface condensation to reduce reflective effectiveness.
- Beautiful colors for pleasing effect.

INSTALLATION

- Easy installation.
- Can be easily fabricated with woodworking tools.
- Large size one-piece panels require minimum of framing materials.
- Designed for use with DFPA "H" Beam and Clip system of sign erection.
- Strong stiff panels are light, easy to handle.

SPECIFICATIONS

A special acrylic overlay over "B" grade Douglas Fir core. Edge-jointed and edge-glued solid cores available.

Thickness	5/16″	3/8″	1/2″	5/8″	3/4″
Size*	48″ x 96″	48″ x 96″	48″ x 96″	48″ x 96″	48″ x 96″
Plies	3	3	5	5	5
Lbs. MSF Acrylic 2 sides	1224	1400	1800	2100	2500
Glue	All exterior glue line.				
Core Construction	Cores are "B" grade Douglas Fir. (edge-jointed and edge-glued cores available if specified.) Panels are 100% hot press manufactured to U.S. Commercial Standards 45-60.				

Larger scarfed panels also available.

*Other sizes available on special order.

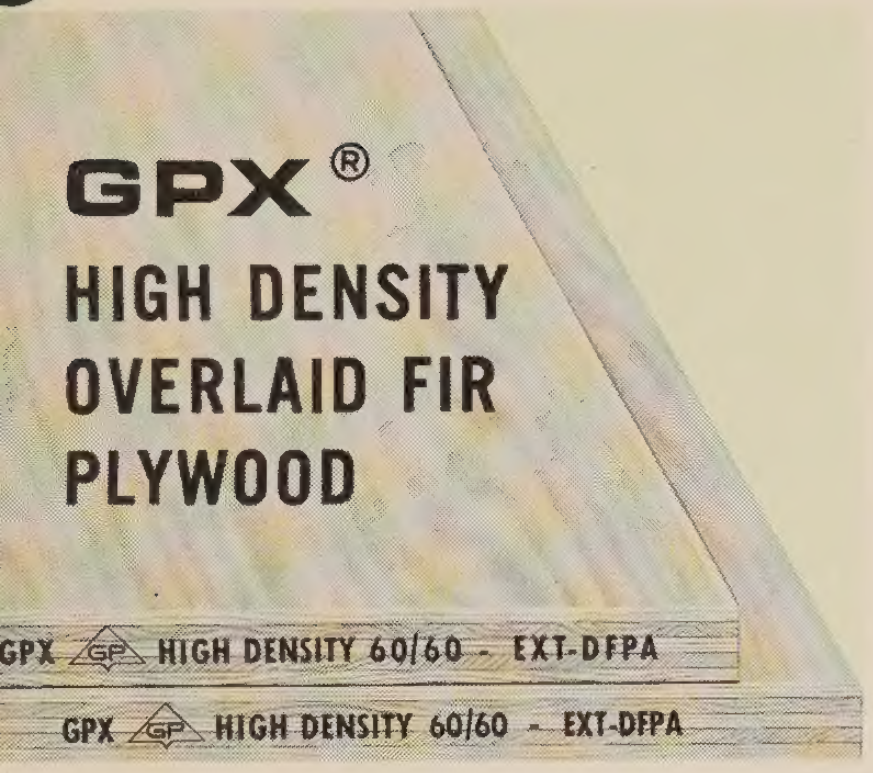

GPX®
HIGH DENSITY OVERLAID FIR PLYWOOD

GPX GP HIGH DENSITY 60/60 - EXT-DFPA
GPX GP HIGH DENSITY 60/60 - EXT-DFPA

GPX High Density has a high grade Douglas Fir Plywood core overlaid with a high resin surface sheet on one or two sides. This overlay is fused to the plywood faces with 100% exterior waterproof phenolic resin glue lines under heat and pressure in standard one-step hot-press method. During the process, the surface flows and sets to become a part of the plywood itself. GPX is manufactured per CS 45-60.

Advantages

GPX High Density for general use

SEMI-TRANSPARENT OVERLAY allows natural grain to show through.

ARMOR-HARD SURFACE offers maximum resistance to abrasion and scratching. Up to 10 times the resistance of unprotected plywood.

WATER RESISTANCE of GPX High Density is up to 20 times that of unprotected exterior plywood.

CHEMICAL RESISTANCE of GPX High Density extends to most common chemicals and allows a broad range of uses not possible with unprotected plywood.

HIGH DENSITY OVERLAY assures protection from extreme conditions such as freezing, steaming, boiling and baking.

GPX High Density for concrete forms

SMOOTH SURFACE on concrete, less finishing cost to the contractor.

DRYING TIME for forms between uses is eliminated.

FEWER FORMS are required because GPX High Density lasts longer. Users get 50 or more pourings per side depending upon physical care and treatment of the form.

EXTRA-HARD SURFACE resists damage and assures long usage of the forms with consistent smooth concrete surfaces.

LITTLE OILING is required. GPX High Density won't cling—saves time and expense of frequent oiling.

Plywood construction‡

plastic overlay GPX high density all-purpose*	1 or 2 sides as specified
face grade under overlay GPX high density all-purpose	A or B fir as specified
back grade under overlay GPX high density all-purpose	A or B fir as specified
inner plies	B fir

*GPX High Density for General Use and Concrete Forms Amber color—black or olive drab on special quotation. Overlay is cellulose fibre impregnated with thermosetting phenolformaldehyde resin. Overlay starts at 60-lb. one or two sides and may be increased in multiples of 30 lb. i.e.: 90/90 lb., 120/120 lb., etc. Plastic one side panels are recommended for specific uses only—preferably where fastened in place.

Sizes

*width 30″, 48″, 60″
**length 60″, 72″, 84″, 96″, 108″, 120″

*thickness	5/16″	3/8″	1/2″	5/8″	3/4″
no. plies	3	3	5	5	5
wt. lb. per M sq. ft.					
overlay 1 side					
GPX high density all-purpose	1010	1185	1585	1885	2285
overlay 2 sides					
GPX high density all-purpose	1070	1245	1645	1945	2345

*GPX high density all-purpose 36″ wide or thicker than 3/4″ on special order.

**Long lengths with scarf joints on special order.

Physical Properties

GPX High Density for general use and concrete forms

ABRASION RESISTANCE AND SURFACE HARDNESS—GPX high-density overlaid plywood is engineered for uses under conditions of heavy abrasion. Extensive tests prove GPX to be approximately 30 times more resistant to abrasion than ordinary plywood. Scratch tests indicate from 20-75% more resistance than ordinary hardboard.

WATER ABSORPTION — Tests were conducted in accordance with USAF Specification 15015A dated January 14, 1949. Results indicate GPX to be 20-25 times more resistant to water absorption than ordinary plywood.

CHEMICAL RESISTANCE—The plastic surface of GPX has excellent chemical resistance to most common household and industrial chemicals. Hydrocarbons (gasoline, kerosene, etc.), salt and soap solutions, hydrochloric and sulphuric solutions, organic solvents (alcohol, acetone, etc.) leave the surface unaffected. Caustic soda solution, ammonium hydroxide and full strength bleach discolor the finish. Conduct individual test before using GPX near unusual chemical solutions.

PAINT LASTS LONGER on GPX than on any other type of wood base product, as proven by tests.

MOLD, FUNGUS, TERMITES, BORERS, ETC.—The surface has remarkable resistance to infestation. Edges of panels must be sealed to prevent pests from attacking the raw wood.

LIGHT STABILITY—Long exposure to sunlight tends to darken the light amber surface the same way a varnished surface darkens slightly with age.

FINISHING—Excellent weathering properties eliminate the necessity of painting GPX High Density. If a change in color is desired, paint can be used. Use paints of the air drying type. Paints having a high percentage of linseed oil are not recommended. Properly applied paint will have a much longer life than the same paint applied to ordinary plywood.

Tips on handling GPX for concrete forms

GPX High Density requires no advance preparation, however, proper care will result in maximum number of re-uses. Use wooden wedges in stripping. Do not drop panels on corners or edges. Clean panels with broom immediately after stripping. Stack flat on level ground. Keep edges sealed. Occasional oiling will extend the useable life of the panel.

GPX General Use is excellent for any working surfaces requiring high abrasion resistance.

GPX®
MEDIUM DENSITY OVERLAID FIR PLYWOOD

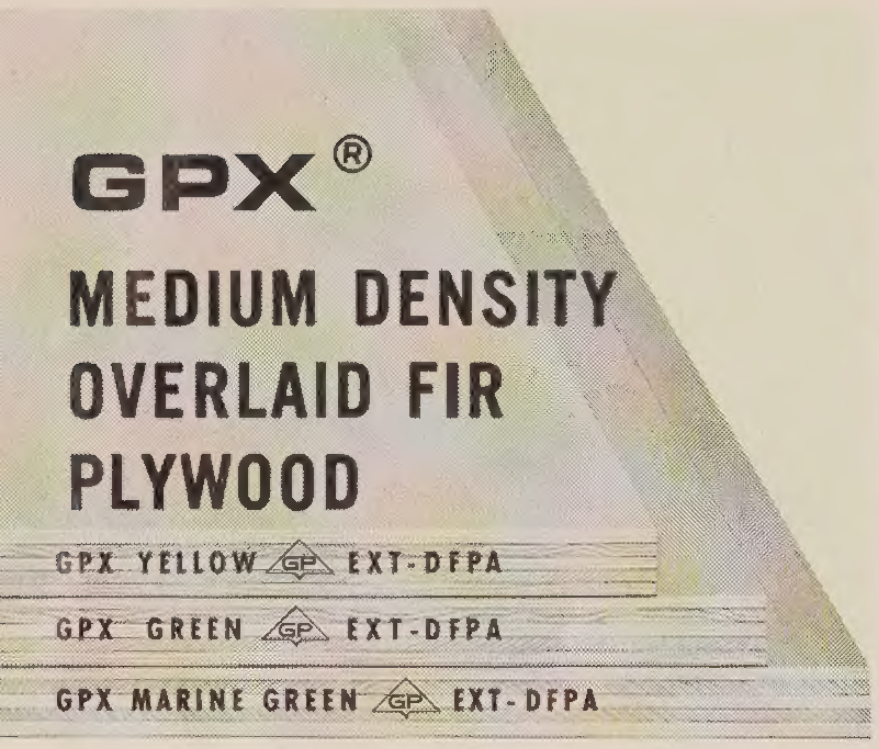

GPX is a high grade Douglas Fir Plywood core and a surface sheet (one or both sides) composed of uncured wood fibers and phenolic resin. The entire sandwich is bonded at one time under heat and pressure causing a molecular action which fuses resin, fibers and plywood core into a single finished product. GPX is manufactured per CS 45-60.

Types

GPX YELLOW offers a selection of core grades to meet the requirements of any job. Interior walls, partitions, paneling, sliding doors, mobile home walls, fittings, cabinets, store counters, fixtures, displays, exterior siding, cooler and freezer linings, industrial uses. Farm barn linings, milking stalls, divider walls. Interior or exterior signs.

GPX GREEN offers high grade solid, one-piece and/or edge jointed and glued core to meet the most rigid specifications. Exterior siding for residences, offices, factories, warehouses, walls, gable ends, sliding doors, cabinets, built-ins, children's furniture, toys, interior display rooms, industrial uses, highway signs, interior or exterior counter displays and signs.

GPX MARINE GREEN is a special panel engineered for boat construction. It is the finest marine grade overlaid panel available for use in building boats of all sizes. Solid, one-piece and/or edge jointed and glued core.

Advantages

COMBINES ADVANTAGES OF PLYWOOD

Structural Strength—Due to the cross-ply-lamination.

Economy—Large size sheets are economical to buy, economical to handle.

Dimensional Stability—Hot press construction—keeps panels stable.

Ease of Handling—Easy to handle in warehouse and on job.

Versatility—One of the most versatile building materials.

WITH THESE OF PLASTICS

Smooth, Hard Surface—No sanding. Requires less paint.

Check-Free, Crack-Free Surface—Phenolic resin combined with cellulose fibers under heat and pressure form an intermolecular bond.

Reduces Grain Raise—Surface barrier protects against grain raise.

Superior Paint Base—Paint lasts two to three times longer.

Flexible and Workable—Bending qualities approximately same as regular plywood. Easy to saw, machine, drill, patch, nail, rivet, glue or edge sand.

Plywood construction

plastic overlay†‡	Available 1 or 2 sides
face grade under overlay	
GPX yellow & green	B fir
GPX marine green	A or B fir or Rotary Lauan (sound patch free)
back grade under overlay	
GPX yellow & green	B fir
GPX marine green	*
inner plies	
GPX yellow	C fir (unless specified B)
GPX green & marine green	B fir (solid, one piece) and/or edge jointed and glued core.

†GPX yellow—if overlay 1 side only, back may be "B" or "C", rough or sanded—as specified.
‡GPX green—if overlay 1 side only, "B" back may be rough or sanded—as specified.
*If overlay on one side only, back may be "A" or "B" grade fir or solid rotary or ribbon Lauan—as specified.
*If overlay on 2 sides, back is sound, patch-free Rotary Lauan or "A" or "B" grade fir—as specified.

Sizes

*width	30″, 48″, 60″					
**length	60″, 72″, 84″, 96″, 108″, 120″					
***thickness	¼″†	5⁄16″	⅜″‡	½″	⅝″	¾″‡
No. plies	3	3	3	5	5	5
Wt. lb. per sq. ft.						
overlay 1 side	930	1030	1180	1580	1880	2280
overlay 2 sides	1000	1100	1250	1650	1950	2350

*36″ width available on special order.
**Long lengths with scarf joints on special order.
***Panels thicker than ¾″ on special order.
†Available in Marine green only.
‡Available ⅜″ 5-ply and ¾″ 7-ply Marine Green only.

Physical properties

ABRASION RESISTANCE AND SURFACE HARDNESS—GPX Medium Density is not intended for use where conditions of extreme abrasion exist, but is specifically engineered to offer a superior paint surface. The abrasion resistance of the paint film itself is of primary importance. The surface on Medium Density is very hard when compared to unprotected wood. In surface hardness tests it is 20-25% more scratch resistant than hardboard, which in itself is a high-performance product.

WATER ABSORPTION—Tests in accordance with USAF Specification 15015-A, January 14, 1949 indicate that GPX Medium Density absorbs water at about one-half the rate of exterior Fir Plywood.

WEATHERING—Tests prove that paint lasts longer on GPX. Hairline cracks are eliminated and grain raise is greatly reduced.

WATER VAPOR TRANSMISSION—Results of this test are important in some cases of insulated construction. The water vapor transmission rate of GPX Medium Density is approximately the same as exterior Fir Plywood having the same number of glue lines. Three plies of wood and overlays both sides and a five-ply exterior Fir Plywood panel would have the same rate.

MINIMUM BENDING RADIUS—Bends to the same short radius as regular exterior grade Fir Plywood.

STRENGTH PROPERTIES—GPX Medium Density has essentially the same strength properties as plain exterior Fir Plywood of corresponding thickness and construction.

SMOOTHNESS—The hard, smooth surface of GPX Medium Density resists grain raise and prevents checking of the underlying wood veneers thereby retaining its smooth unbroken surface for the life of the panel.

FINISHING—GPX Yellow is designed for painting. All paints adhere to its clean dry surface, greatly extending the life of properly applied paint films even under severe weather conditions. Follow normal painting practice. Sand between coats.

GPX Green—Specifically engineered for interior or exterior painting. Its superior surface "tooth" permits perfect finishing with just one coat of paint and primer. As with all plywood, however, edge sealing is recommended for exterior applications.

GPX Marine Green—Combines the superior qualities of GPX Green (above) with its own exclusive advantages. The availability of Lauan veneer under the overlay and back—as specified guarantees an absolutely smooth, flat panel surface. The availability of an overlay one side and either Rotary or Ribbon Lauan on the other make it ideal for both the natural interior finish as well as the exterior finish.

SPECIAL TYPES

Marine Exterior Plywood

A premium panel for boat hulls and super-structures.

	width†	length†	thick-ness	wt. lb. per M sq. ft.	no. plies	panel grade	face grade	back grade	inner grades	adhesive bond	edges
		8′	¼″	790	3				B grade		
panels	48″	to	⅜″	1125	3 or 5	A-A*		A	solid and		
		24′	½″	1525	5	or	A	or	edge-	exterior	square
			⅝″	1825	5	A-B*		B	jointed		
			¾″	2225	5 or 7						

†Widths from 30″ to 60″ and lengths over 24′ available on special order. Lengths over 10′ scarfed.

*Per CS 45-60 as modified for Marine exterior plywood.

Hardboard Overlay Plywood

Used for underlayment, counter-tops, counter-fronts, cabinet doors, wardrobes, shelving.

	width	length	thick-ness	wt. lb. per M sq. ft. one side	wt. lb. per M sq. ft. two sides	no. plies	G-P hardboard overlay	adhesive bond	edges
			⁵⁄₁₆″	1375	....	3	*one side H-D		
	48″	96″	⅜″	1550	....	3			
panels	48″	96″	½″	1950	2150	5	*one side H-D	interior	square
			⅝″	2250	2500	5	or		
			¾″	2650	2875	5	two sides H-H		

*If hardboard is on one side only, core and back are D grade (or B grade on special order).

If hardboard is on both sides, core and cross-banding are B grade (solid).

Texture 1-11

grade	exterior, DFPA inspected
form	grooved panels
size	16″, 32″, 48″ wide 8′, 9′ or 10′ long ⅝″ thick
catalog reference	G-P siding, sheathing

*Striated-Coated**

grade	CS 45-60
form	striated panels
size	4′x8′,9′ or 10′ long, ⁵⁄₁₆″ and ⅜″ thick
catalog reference	G-P Decorative plywood and G-P siding, sheathing

*U.S. Pat. No. 2,782,468.

Premium 2-4-1

grade	premium t&g 2-4-1
form	plain panels—t&g on 8′ edges
size	4′x8′, 1⅛″ thick
catalog reference	G-P siding, sheathing

Ripplewood®

grade	selected—interior
form	textured panels
size	4′ x 8′ x ⁵⁄₁₆″
catalog reference	G-P Decorative Plywood

RANCH PANEL

the new, low cost, all-purpose siding and utility panel



Cross Section of Ranch Panel

5 colors and Factory coated

RURAL RED	LIGHT GREEN	BROWN	GREY	OFF WHITE

MATERIAL—G-P Ranch Panel—100% Douglas Fir with faces and backs either edge-glued or one-piece. The lightly textured face is factory coated with G-P's exclusive baked-on performance guaranteed finish. Five colors to choose from: Rural Red, Light Green, Brown, Grey, Off White. The completely waterproof exterior glue bond makes this panel ideal for all types of construction.

FEATURES—G-P Ranch Panel—an all-purpose panel for exterior use such as: • Farm construction • Summer and vacation homes and cabins • Fencing • Sidewalk construction barriers • Siding for city dwellings. Conforms to F.H.A. requirements.

ECONOMY— • Less Labor—eliminates on-site painting • Less Maintenance—tough factory finish • Lower Cost—combination sheathing and siding panel.

Farm buildings



Summer cabins

Face	"C" or better (lightly textured) Plain or Grooved*
Patterns	*Channel grooves 4″ or 8″ O.C. available all thicknesses except ⁵⁄₁₆″ *V-grooving available—6-4-6-8-8-6-10 inches O.C. Shiplapping available all thicknesses except ⁵⁄₁₆″
Centers, Back Core	"C" grade (no open defects exceeding 1″ measured across the grain)
Glue Bond	Exterior
Thickness	⁵⁄₁₆″ ⅜″ ½″ ⅝″ ¾″
Number of Plies	3 3 5 5 5
Veneers	100% Douglas Fir Faces and Backs either edge-glued or one-piece
Finish	Finish baked-on at factory. Rural Red, Light Green, Brown, Grey, Off White
Width	4 feet (48⅜″ if shiplapped)
Length	8 feet. 9 feet, 10 feet on special order

Panel complies with CC Ext. grade per CS 45-60.

FIR PLYWOOD

Two basic types of Douglas Fir Plywood are produced by Georgia-Pacific. Exterior plywood is manufactured with 100% waterproof glue for marine and outdoor use. Interior plywood is manufactured with moisture-resistant adhesives for use where waterproofing is not a necessity. A full range of grades, sizes and thicknesses in both types are available.

Advantages

STRUCTURAL STRENGTH—The cross-ply laminated construction gives strength in two directions.

DIMENSIONAL STABILITY—The cross-lamination balances the natural stresses in wood grain.

ECONOMICAL TO BUY AND TO USE—Large size panels go up fast—cut labor costs.

QUALITY GUARANTEED—G-P Douglas Fir Plywood equals or surpasses the quality controls of the plywood industry. Each panel of Exterior and Interior Douglas Fir Plywood is branded with the G-P trademark, your guarantee of quality.

Veneer grades

"A"—Highest standard appearance quality veneer. Smooth and paintable. If made of more than one piece, veneer is to be well joined and reasonably matched. Neatly made repairs, shims, streaks and sapwood permitted. No open defects or knots.

"B"—Similar to "A" veneer except that tight knots, circular plugs, limited sander skips and splits not wider than 1/32″ permitted.

"C" (REPAIRED)—For underlayment. Tight knots, open defects not to exceed 1/4″ x 1/2″, splits not over 1/16″ wide, limited sander skips and torn grain allowed.

"C"—Standard for use as inner plys and backs (some grades) in Exterior plywood. Permits tight knots to 1 1/2″, knotholes to 1″, splits 3/16″ or less that taper to a point, plugs and other repairs.

"D"—Used only for Interior-type plywood. Allows pitch pockets, splits, knotholes to 2 1/2″ and other open defects, plugs and other repairs.

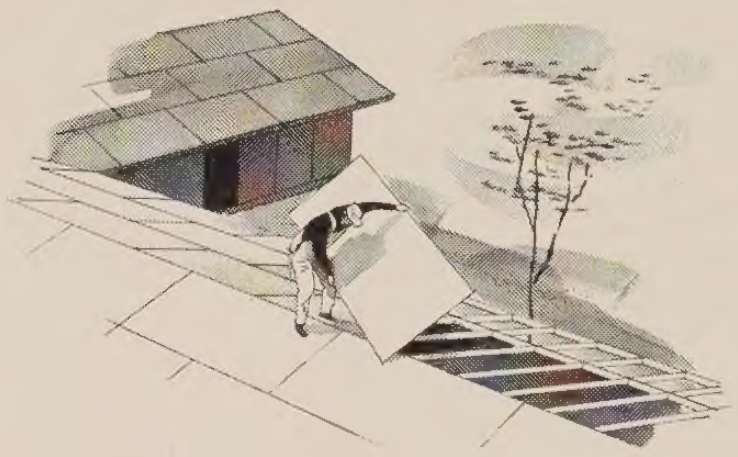
Roof and wall sheathing

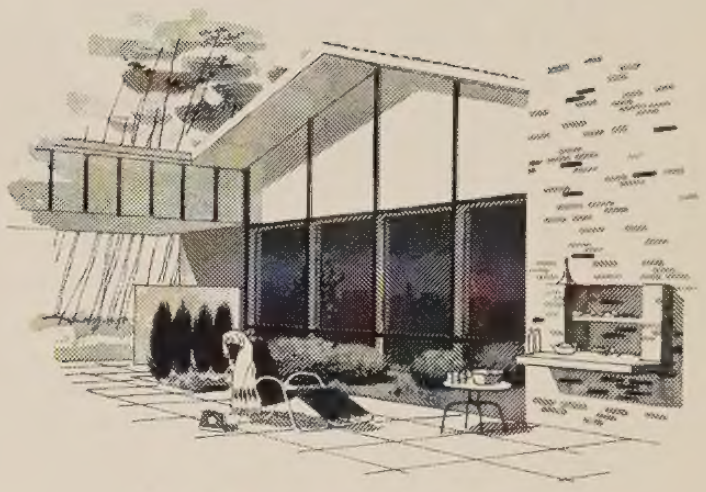
Soffits and gable ends


Home workshop projects

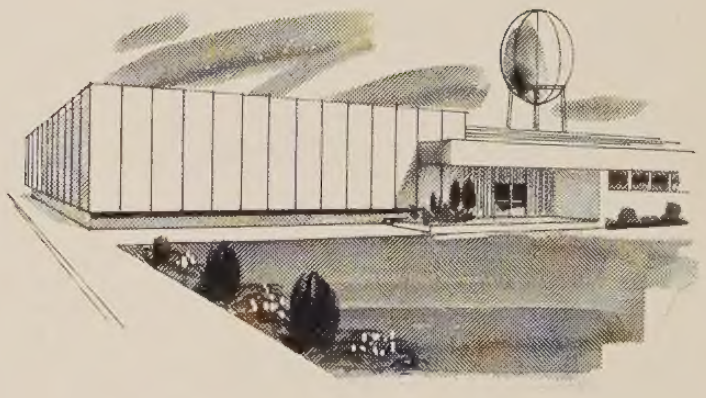
Industrial buildings

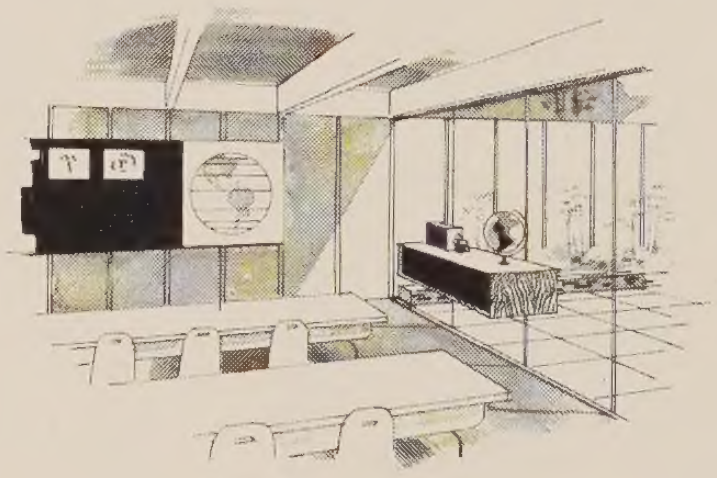
Schools

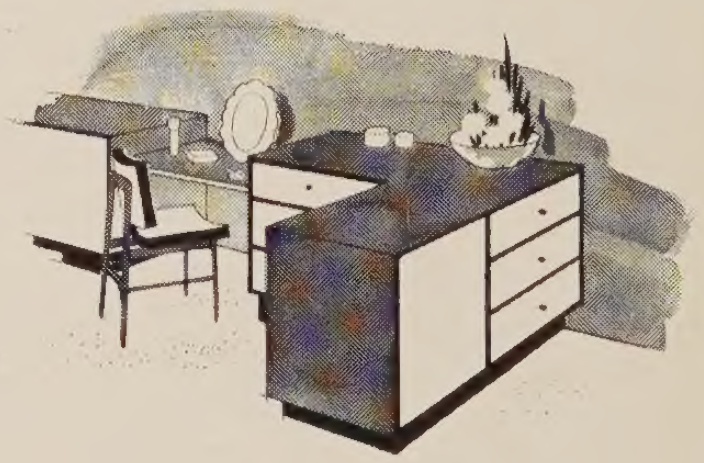
Built-ins, cabinets and closets

Farm buildings

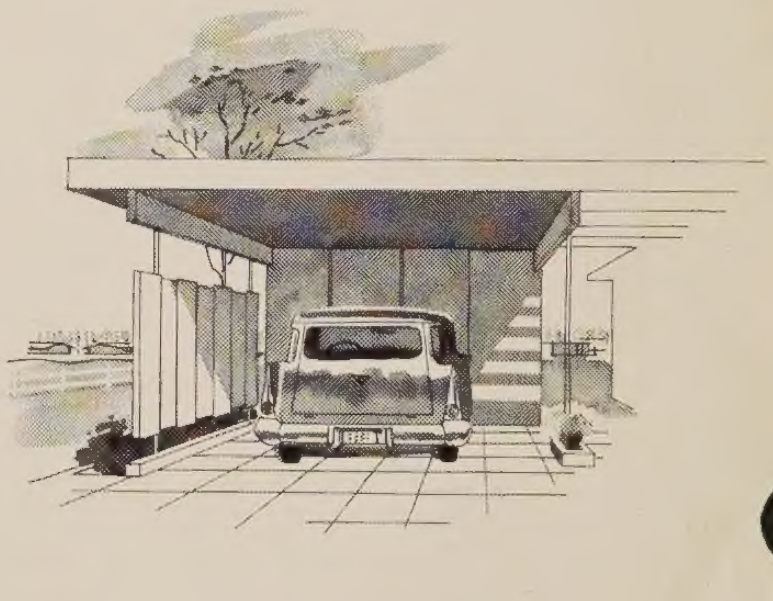
Carport, fences, etc.

DFPA grade	description and use	veneer grade			stock sizes**		
		face	back	inner plies	width	length	thickness*
EXTERIOR TYPES							
A-A	For permanent exterior uses where appearance of both sides is important, boats, signs, fencing, outdoor furniture, carports, etc.	A	A	C	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
A-B	Permanent outdoor use where appearance of one side is of primary importance with solid opposite side.	A	B	C	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
A-C	"One side" grade for such exterior uses as siding, soffits, fences, outdoor signs, displays, cutouts.	A	C	C	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
B-C	Utility outside building panel, farm buildings, storage, etc.	B	C	C	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
C (repaired)-C	Underlayment grade, where extreme moisture conditions are present, for tile, linoleum, etc.	C† (repaired)	C	C	48″	96″	5⁄16″, ⅜″, ½″, ⅝″, ¾″
B-B	Exterior—maximum re-use concrete form, edges sealed with red sealer. Mill oiled unless otherwise specified. Available in ⅝″ and ¾″ thicknesses.	B	B	C	48″	96″	⅝″, ¾″
C-C■	Unsanded structural panel with waterproof glue for exterior uses including exposed sheathing, construction open to weather and extreme dampness.	C	C	C	48″	96″	5⁄16″, ⅜″, ½″, ⅝″, ¾″
INTERIOR TYPES							
A-A	Indoor use where appearance of both sides is important. Built-ins, furniture, cabinet doors, partitions.	A	A	D	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
A-B	Interior use requiring one surface of highest appearance with solid opposite side. Uses similar to A-A.	A	B	D	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
A-D	'One side" grade for many interior uses, paneling, counters, built-ins, displays, cutouts, backing and underlayment.	A	D	D	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
B-D	Utility interior panel for uses requiring one solid surface. Backing, cabinet sides, concealed partitions.	B	D	D	48″	96″	¼″, ⅜″, ½″, ⅝″, ¾″
C (repaired)-D	Underlayment grade for tile, linoleum, carpeting.	C† (repaired)	D	D‡	48″	96″	5⁄16″, ⅜″, ½″, ⅝″, ¾″
B-B ***	Reusable concrete form plywood, edges sealed with green sealer. Mill oiled unless otherwise specified. Available in ⅝″ and ¾″ thickness.	B	B	C	48″	96″	⅝″, ¾″
C-D■	Unsanded construction grade, for use as wall and roof sheathing, sub-flooring, barriers, temporary structures or shelters, packing cases, etc.	C	D	D	48″	96″	5⁄16″, ⅜″, ½″, ⅝″, ¾″
C-D■ (Exterior) (glue)	This grade has regular exterior, waterproof glue. Not normally a substitute for exterior plywood.	C	D	D	48″	96″	5⁄16″, ⅜″, ½″, ⅝″, ¾″
2-4-1■	Cost-saving combination sub-flooring and underlayment base for tile, linoleum, wood strip or block flooring, carpeting. Used on 4-foot span grid system. Available in 1⅛″ thickness only.	C†	D	D	48″	96″	1⅛″

*Number plies—3 (¼″, 5⁄16″, ⅜″ plywood).
5 (½″, ⅝″, ¾″ plywood).
***B-B interior other than concrete form is manufactured with D inner plies.

† See veneer grade text at left.
‡ Veneer under face, C or better.
■ For complete information on G-P Premium and Standard Sheathing and G-P Premium and Standard 2-4-1, see Siding and Sheathing section.

**Other sizes available: Widths to 60″, lengths to 144″. Lengths over 144″ available with scarf joint.

Specifying plywood

Take the same care in specifying plywood that you use in ordering any other material: For Douglas Fir Plywood stipulate number of pieces, number of plies, width, length, moisture resistance (glueline type), appearance grade, finished thickness and whether sanded or unsanded, or name of special product. For hardwood and other species, include face species and core species.

About 75% of all plywood is produced in 4′ x 8′ panels. These dimensions are multiples of practically any working module in the construction industry; so estimating the quality required is simplified. Exact panel sizes minimize waste. Plywood is never "green", thus it is not necessary to discount for shrinkage.

Industry type and grade identification provide valuable guides to help prevent misuse. Applicable standards are covered in detail in U. S. Commercial Standards as follows:

Douglas Fir Plywood—
CS 45-60

Other Western Softwood Plywoods—
CS 122-60

Hardwood Plywoods—
CS 35-61

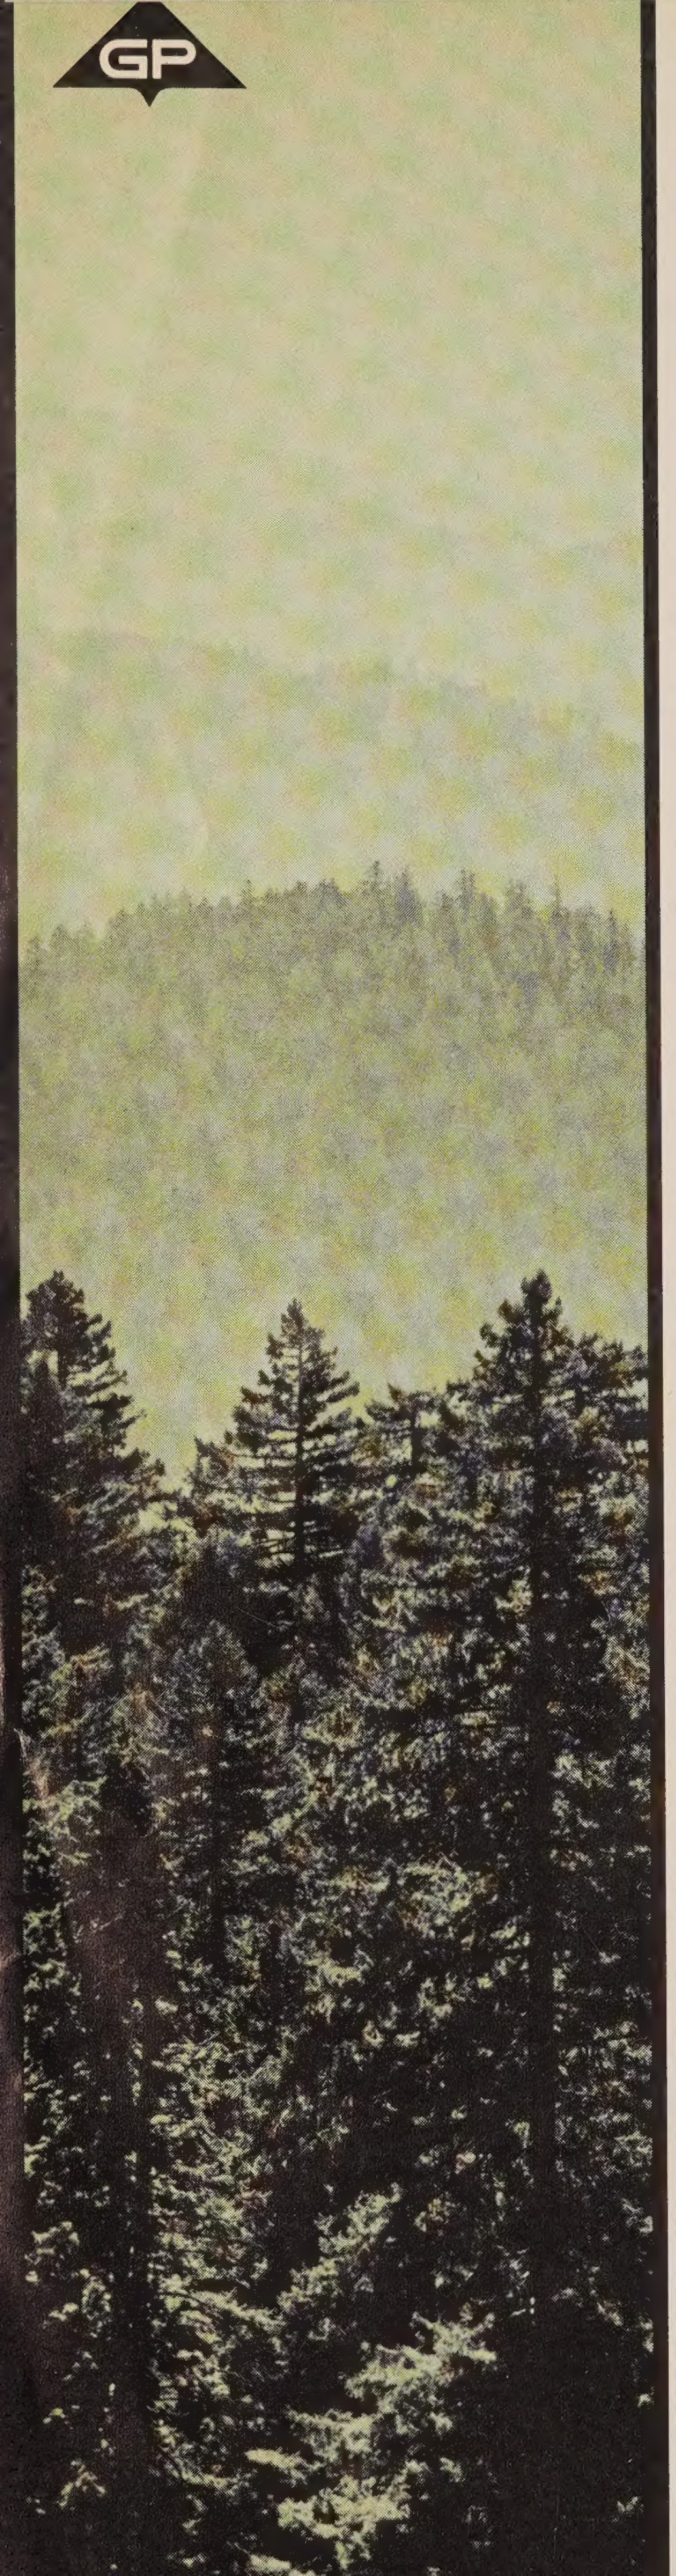

sales offices

PLYWOOD

California
- Los Angeles:
  Pico Rivera: 7240 Crider Ave.

Georgia
- Atlanta: 255 Ottley Drive, N.E.
- Savannah: P.O. Box 2189

Illinois
- Chicago:
  Franklin Park: Waveland and Carnation

Minnesota
- Minneapolis: Foshay Tower

New Jersey
- Clifton: 400 Allwood Road

Oregon
- Portland: Equitable Bldg.

Texas
- Dallas: 2422 Butler St.

REDWOOD LUMBER

California
- Samoa
- San Francisco: 400 Montgomery St.
- Los Angeles:
  Pico Rivera: 7240 Crider Ave.

Georgia
- Augusta: Southern Finance Bldg.

Illinois
- Chicago: 35 East Wacker Drive

New York
- New York: 375 Park Avenue

Oregon
- Portland: Equitable Bldg.

Texas
- Dallas: 2422 Butler Street

WESTERN LUMBER

Oregon
- Portland: Equitable Bldg.

SOUTHERN LUMBER

Georgia
- Augusta: Southern Finance Bldg.

distribution centers

Alabama
- Mobile: 3212 Crichton Street

Arizona
- Phoenix: 4801 West Colter St.

California
- Bakersfield: 2231 "R" Street
- Fresno: 3140 California Ave.
- Los Angeles:
  Pico Rivera: 7240 Crider Ave.
- North Hollywood: 5422 Fair Ave.
- Oakland: 2109 Peralta
- Riverside: 2751 Durahart St.
- Sacramento: 320 Commerce Circle
- Salinas: 1031 Industrial Ave.
- San Diego: 4903 Pacific Highway
- San Jose: 660 East Gish Road

Colorado
- Denver: 725 West Bayaud Ave.

Connecticut
- Wallingford:
  805 N. Colony Road

Florida
- Jacksonville: 3511 Walnut Street
- Orlando: 2721 Regent Street
- Tampa: 2817 35th Street

Georgia
- Atlanta: 255 Ottley Drive, N.E.

Illinois
- Chicago:
  Franklin Park: Waveland and Carnation
- Chicago: 11909 Avenue "O"
- East Peoria: 206 West Camp St.

Kansas
- Kansas City: 2935 Chrysler Road

Louisiana
- Lafayette: 400 N. Pierce Street
- New Orleans: 501 City Park Ave.

Maine
- Lewiston: 70 Commercial Street

Maryland
- Baltimore: 301 South Kresson St.
- Easton: Cherry St. & Penn. Ave.

Massachusetts
- Needham: New England Indust. Center
  60 Kendrick St., Box 185,
  Needham Heights 94

Michigan
- Grand Rapids: 825 Buchanan Ave., S.W.
- Royal Oak: 126 East Hudson St.

Missouri
- St. Louis: 5900 Manchester Ave.

Montana
- Billings: Bernard Street
- Great Falls: 901 River Drive South

New Hampshire
- Manchester: 880 Page Street

New Jersey
- Clifton: 400 Allwood Road
- Long Branch: 174 Branchport Ave.
- Port Newark: 102 Marsh Street
- Vineland: Mill and Pine Streets

New Mexico
- Roswell: 933 E. Jefferson St.

New York
- Rochester:
  315 Platt Street
- Syosset, L.I.: 175 Underhill Blvd.
- Syracuse:
  Midler Park Drive
- Yonkers: 75 Tuckahoe Road

North Carolina
- Charlotte: 2115 Freedom Drive

Ohio
- Akron: 2644 Gilchrist Road
- Cincinnati: 5402 Vine Street
- Cleveland: 19100 Holland Road
- Toledo: 2461 Dorr Street

Oregon
- Eugene: 885 McKinley St.
- Portland: 330 S.E. Division Place

Pennsylvania
- Hatfield: Hatfield Valley Rd.
- Lancaster: 549 West Roseville Rd.
- Pittsburgh:
  New Stanton: Hunker Road
- Philadelphia: 63rd St. & Eastwick Ave.

Rhode Island
- Providence: Harborside Ind. Park

South Carolina
- Columbia:
  Brookwood Drive & Duval St.
- Greenville: Station B Keith Dr.

Tennessee
- Memphis: 1203 Terminal Street

Texas
- Dallas: 2422 Butler Street
- El Paso: 431 North Piedras
- Fort Worth: 400 East Vickery Blvd.
- Houston: 4715 Calhoun Road
- Port Arthur: 3024 Commerce St.
- San Antonio: 1702 S. Alamo Street
  at Main Street

Utah
- Salt Lake City: 375 W. Whitney Ave.

Virginia
- Richmond: 1904 Dabney Rd. at
  Westwood Avenue

Washington
- Olympia: Port of Olympia,
  Shed C. Annex
- Pasco: Pasco Air Base
- Seattle: 410 Terry Ave. North
- Spokane: 3420 N. Regal Street
- Tacoma: 824 East 25th Street

Washington, D.C.
- 3025 "V" Street, N.E.

Wisconsin
- West Allis: 8229 W. Greenfield Ave.

GEORGIA-PACIFIC

EQUITABLE BUILDING • PORTLAND 4, OREGON